


# Telcomec GLF

## ELECTROMAGNETIC DISC CLUTCH WITH BEARINGS


### GLF

### Electromagnetic discs clutch with bearings

#### Example of application

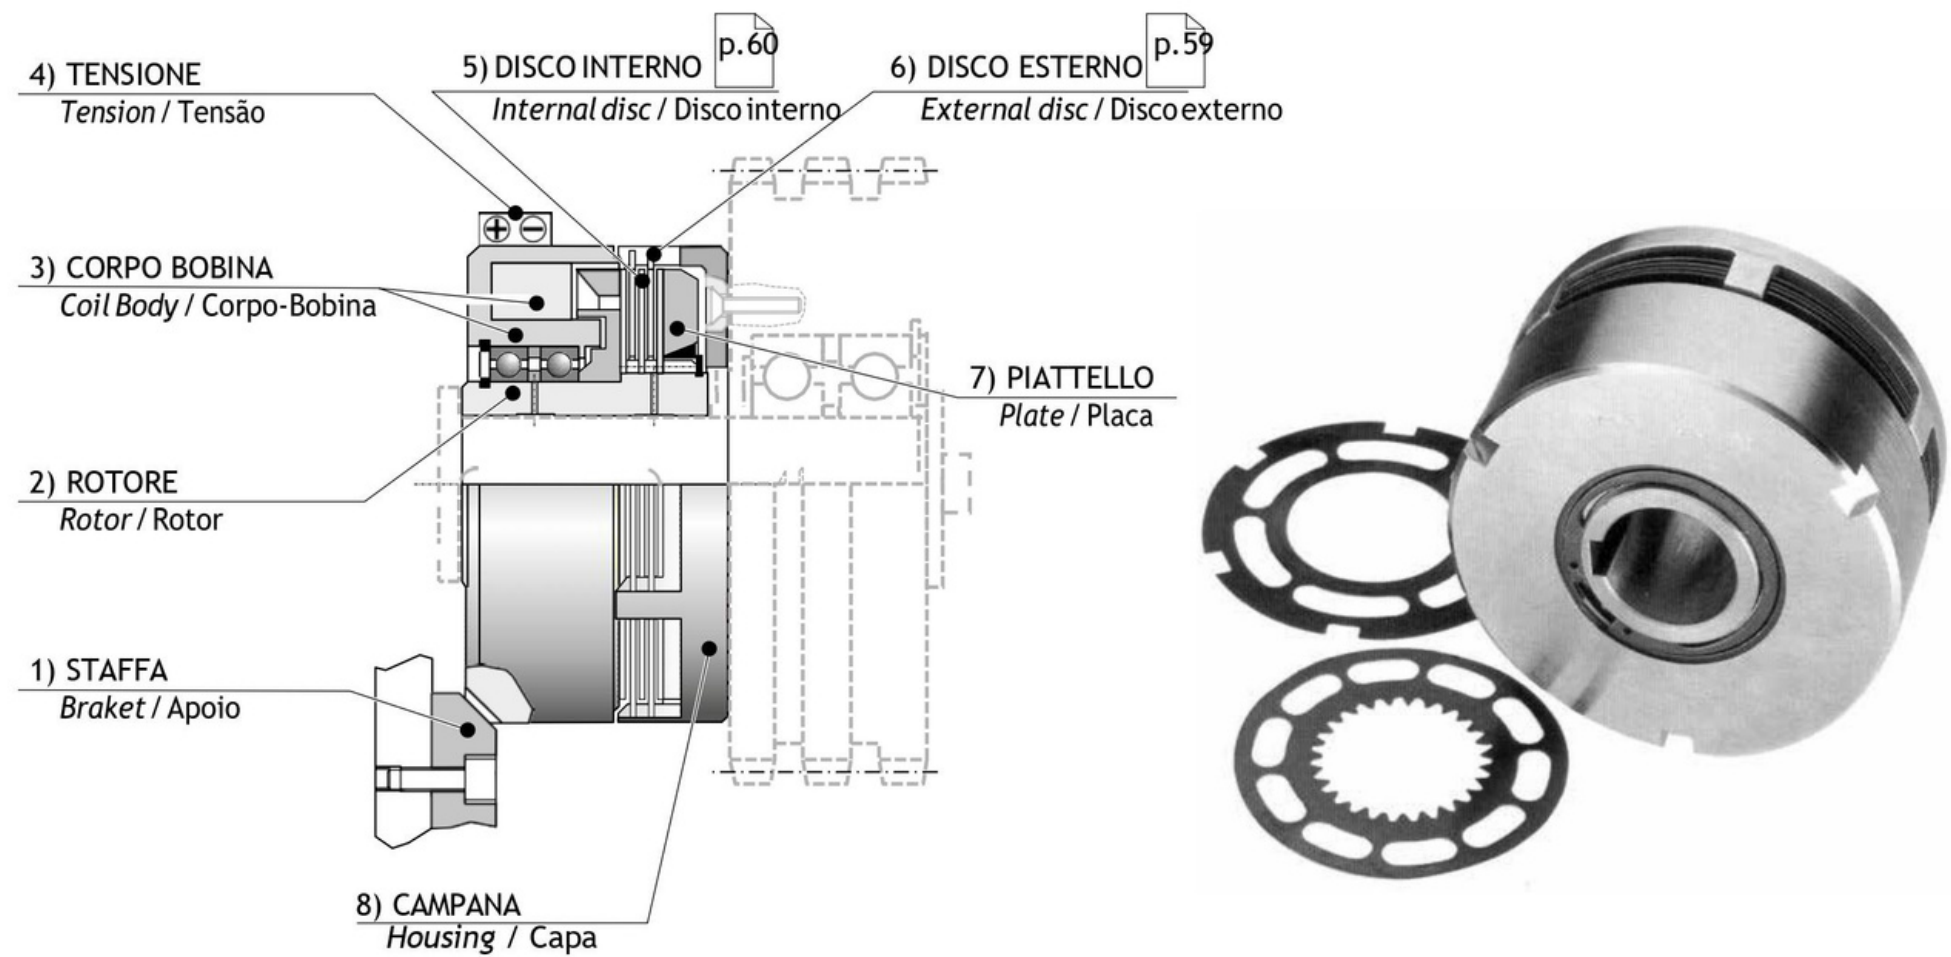

#### Connessione / Connection / Conexão

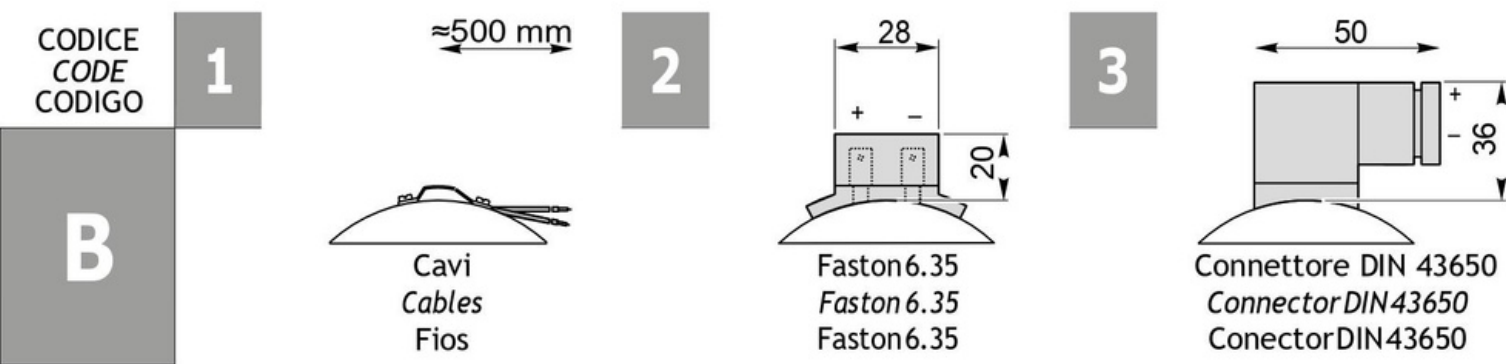

#### Caratteristiche / Characteristics / Características

TAGLIA SIZE TAMANHO	Coppia nom. Statica Nom. Static Torque Torque nom. est. CU 1)	Tensione Nominale Nominal Voltage Tensão	Potenza assorbita Input Power Potência	n <sub>max</sub> in olio oil em óleo	Dischi interni Internal discs Discos interno	Dischi esterni External discs Discos externo	Kg
	Nm	V (C.C - D.C)	W	rpm	n°	n°	
GLF70	10	24	22	4500	3	2	1.3
GLF82	20	24	32	4500	3	2	1.5
GLF95	40	24	39	4000	4	3	2
GLF114	100	24	46	3800	5	4	3.5
GLF134	200	24	65	3800	5	4	5.5
GLF166	400	24	84	3500	5	4	10
GLF166E	600	24	114	3500	7	6	9.5
GLF195	800	24	100	3500	6	5	15
GLF210	1100	24	130	3000	6	5	19
GLF240	1800	24	150	3000	7	6	27
GLF258	2400	24	160	2500	8	7	30

1) Selezione del valore di coppia vedere pag. / Selection the torque value see page / Seleção do valor de torque página




# Telcomec GLF

## ELECTROMAGNETIC DISC CLUTCH WITH BEARINGS


GLF

### Electromagnetic discs clutch with bearings

#### Dimensions

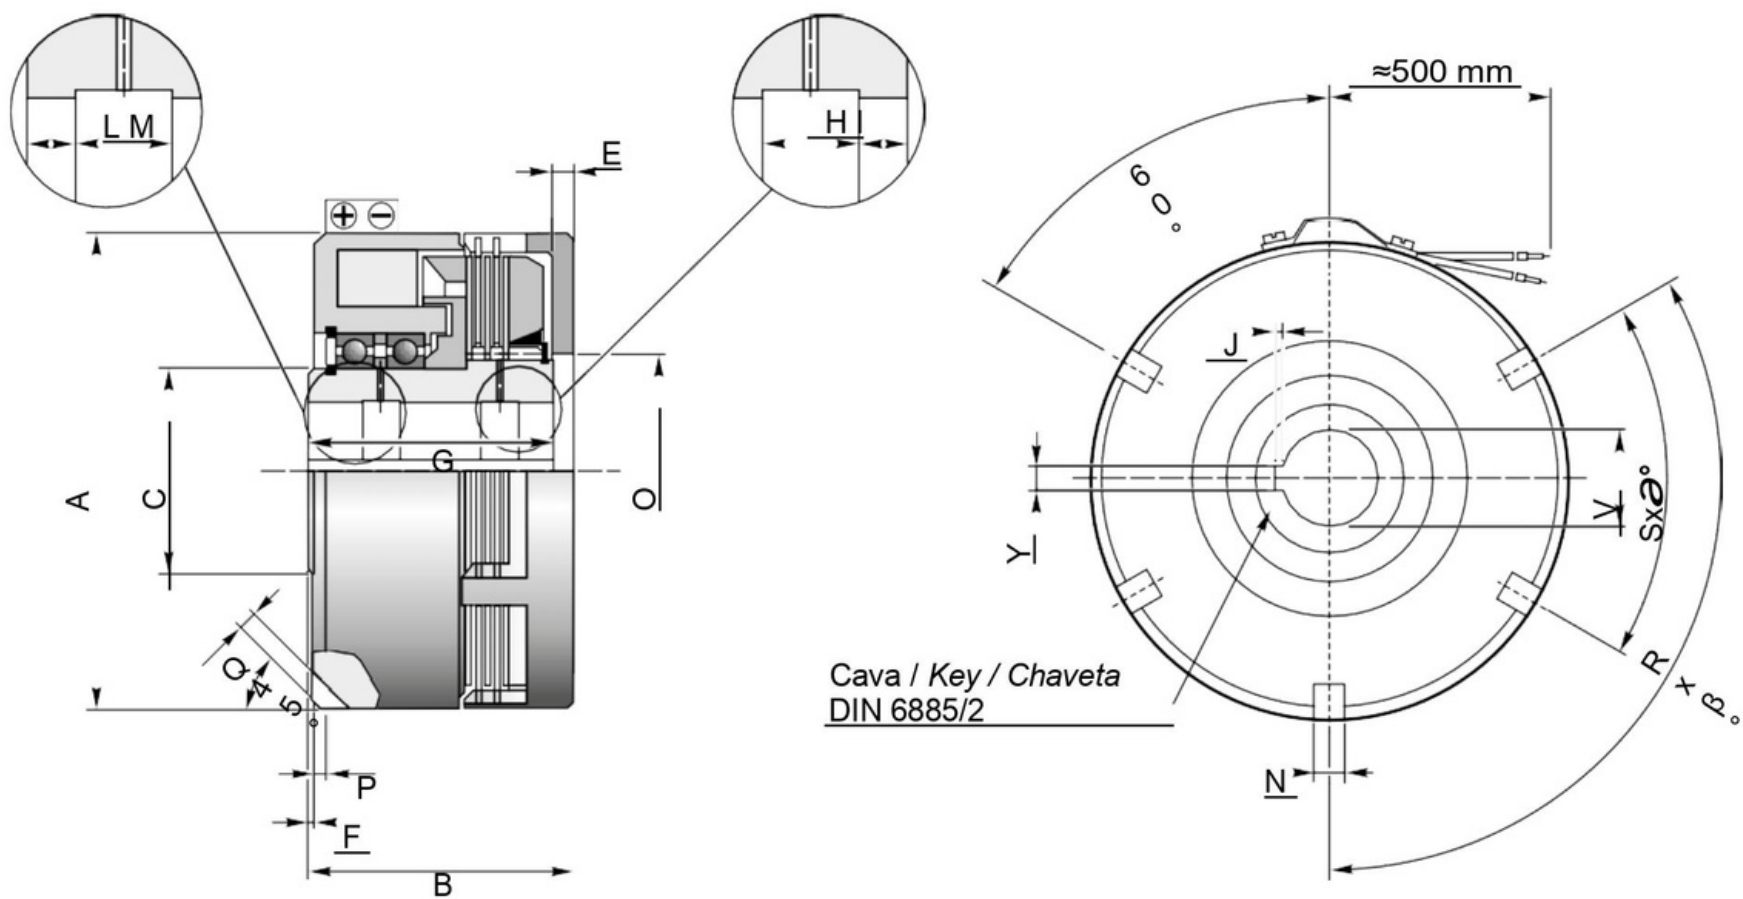

#### Albero / Shaft / Eixo

		GLF..																																					
C	TAGLIA SIZE TAMANHO	70			82			95			114			134			166			166E			195			210			240			258							
	CODICE CODE CODIGO	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3	1	2	3					
	ØV H7	8	10	14	14	16	18	25	28	30	28	32	34	36	40	42	45	50	52	45	50	55	52	56	65	60	65	70	65	70	80	85	92	100					
	Y	-	-	5	5	5	6	8	8	8	8	10	10	10	10	12	12	14	14	16	14	14	16	16	16	16	18	18	18	20	18	20	22	22	25	28			
	J	-	-	1.3	1.3	1.3	1.3	1.7	1.7	1.7	1.7	2.1	2.1	2.1	2.1	2.1	2.1	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	2.6	3.1	3.1	3.1	4.1	3.1	4.1	4.1	4.1	4.1	4.1	5.1		
	n°Cave/ n° Key / n° Chaveta	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1		

#### Dimensioni / Dimensions / Dimensões

TAGLIA SIZE TAMANHO	A	B	C	E	F	G	H	I	L	M	N	R x β°	S x Ø°	O (H7)	P	Q
GLF70	70	38.5	20	4	0.5	34.5	-	-	-	-	6	3x120°	-	24	-	3.5
GLF82	82	51	25	5	1	46.5	-	-	-	-	6	3x120°	-	30	2	4
GLF95	95	56	40	5	1.5	52	8	7	-	-	6	3x120°	-	45	2	4
GLF114	114	63	45	6	1.5	58.5	10	10	-	-	8	3x120°	-	50	2	4
GLF134	134	73	55	6	1.5	68	12	12	-	-	8	3x120°	-	60	2	5
GLF166	166	82.5	65	8	1.5	76	13	13	-	-	8	3x120°	-	70	2	6
GLF166E	166	91	70	7.5	0.5	84	12	19	16	11	8	-	5 x 60°	60	3	6
GLF195	195	94.5	80	9	1	83.5	18	10.5	17	12	12	-	5 x 60°	70	3	8
GLF210	210	103	85	10	2	91	18	11.5	19	14	12	-	5 x 60°	75	3	8
GLF240	240	110.5	100	10	2	98	19.5	13.5	19	13	12	-	5 x 60°	90	3	10
GLF258	258	112	120	10	2	99.5	21	12.5	-	-	12	-	5 x 60°	120	3	10

#### Codice d'ordine / Ordercode / Codigopara pedido

TAGLIA SIZE TAMANHO	CONNESSIONE CONNECTION CONEXAO	Ø ALBERO Ø SHAFT Ø EIXO
	B	C
GLF95	.2	.2
GLF70 ... GLF258	1 2 3	1 2 3

TELCOMEC