



Caliper Brake

Hand Operated

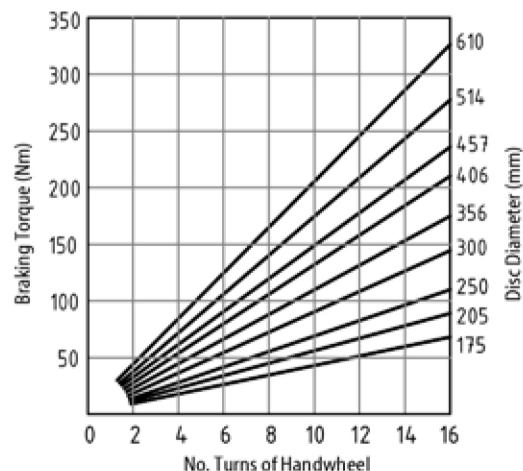

CBM 5

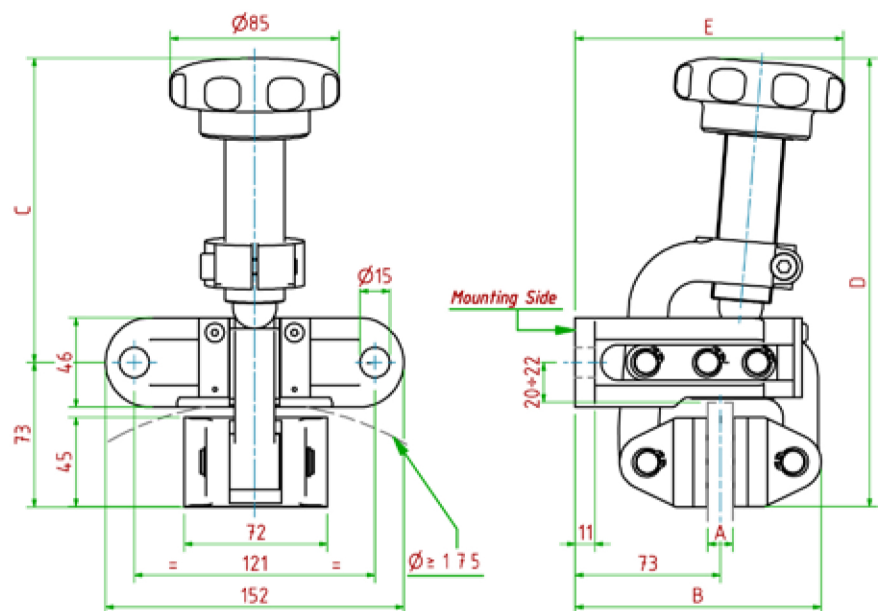

Braking Torque: $M_d = [F_t x (\Phi(m)/2 - 0.029(m))]$



Warning: Initial Braking Torque can be reduced by 30%-50%

Maximum total wear of pads = 9mm

MODEL	CODE	A	B	C	D Max	E Max	Braking Force	Weight
CBM 5/12	051050701	12.7	124	153	226	136	$F_t = 1200N$	4.4kg
CBM 5/25	051050702	25.4	130	153	226	136	$F_t = 1200N$	4.6kg



CBM 6

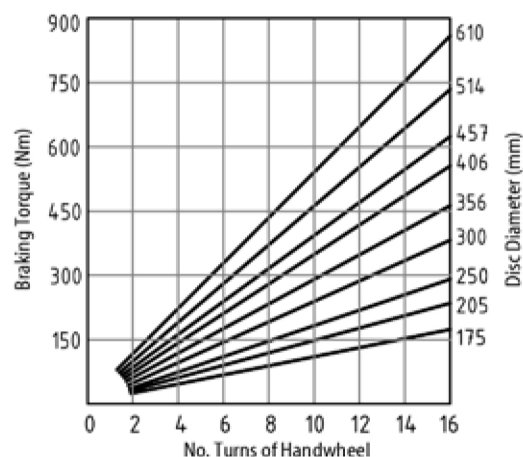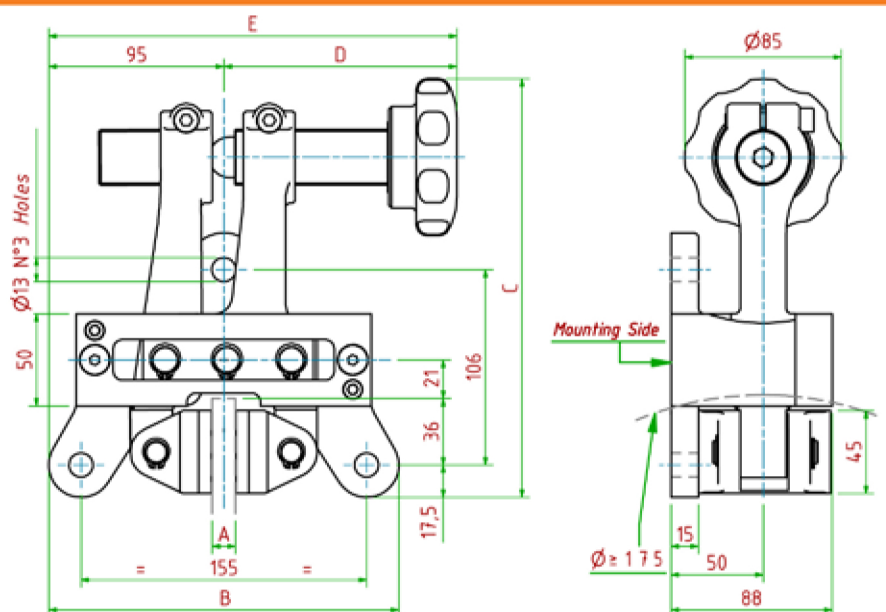

Braking Torque: $M_d = [F_t x (\Phi(m)/2 - 0.029(m))]$

Warning: Initial Braking Torque can be reduced by 30%-50%

Maximum total wear of pads = 9mm

MODEL	CODE	A	B	C	D Max	E Max	Braking Force	Weight
CBM 6/12	051060701	12.7	190	227	127	222	$F_t = 3040N$	8.2kg
CBM 6/25	051060702	25.4	190	227	128	223	$F_t = 3040N$	8.4kg

