


ATC-C Series

Pneumatic Applied Spring Released Tooth Clutch Coupling

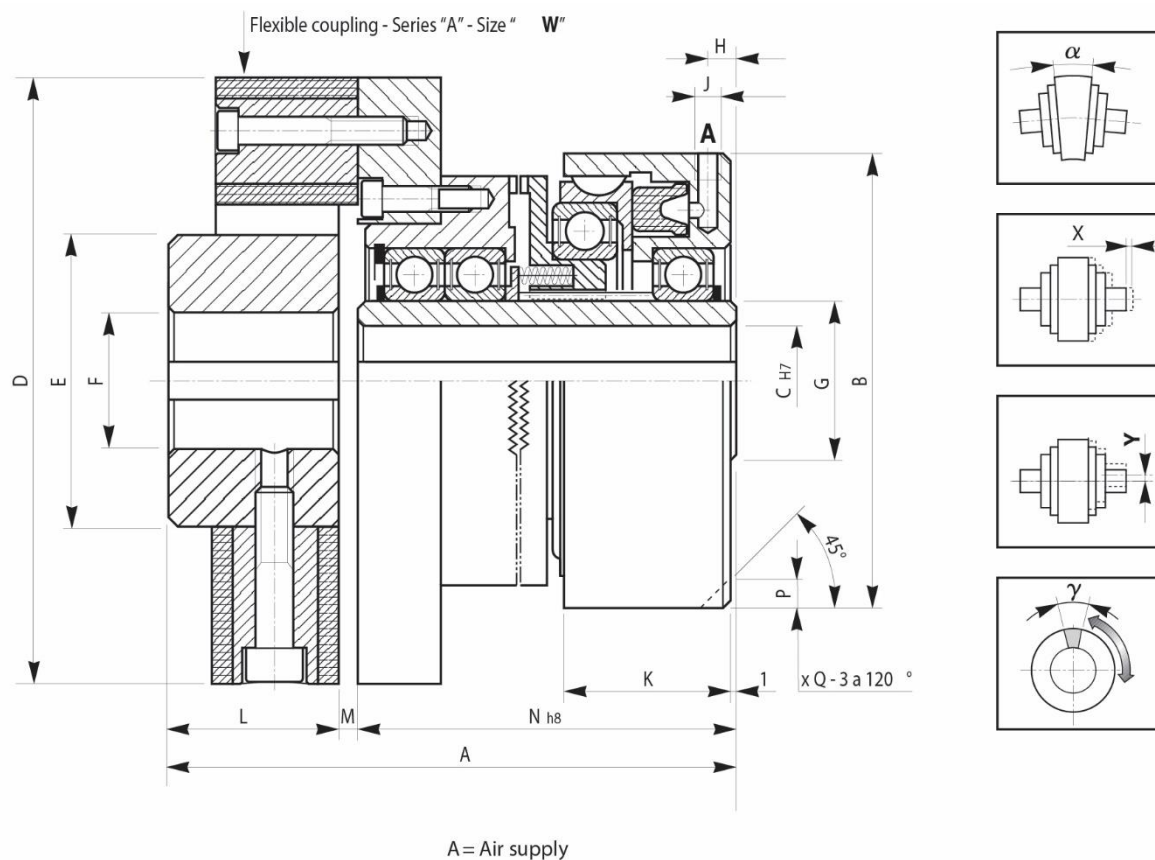

Model	Torque Ms (Nm)	Max. R.PM	Working Pressure (bar)	Cylinder Volume (cm ³)	Coupling Size (W)	Weight (kg)
00	110	3000	6	6	8	5.8
01	160	3000	6	8	12	6.5
02	260	2400	6	12	16	9.8
03	350	2400	6	15	22	11.4
04	550	2000	6	25	30	19.5
05	750	2000	6	30	50	21.9
06	1300	1600	6	40	90	36.4
07	2100	1400	6	50	140	45.7

Model	A	B	C		D	E	F		G	H	J	K	L	M	N	PxQ	X	Y	α	γ
			Min	Max			Min	Max												
00	132	97	14	20	120	60	12	38	30	7	1/8"	38	42	4	86	9x10	2	1	1°	7°
01	139	115	15	25	122	60	12	38	35	7	1/8"	46	42	4	93	10x10	2	1	1°	4°
02	154	127	18	34	150	70	15	48	45	7	1/8"	44	50	6	98	10x10	3	1	1°	7°
03	157	134	18	34	150	70	15	48	45	7.5	1/8"	45	50	6	101	10x10	3	1	1°	4°
04	186	153	20	46	200	100	20	65	60	9	1/4"	49	66	8	112	12x12	3	1	1°	7°
05	187	167	25	50	200	100	20	65	65	9	1/4"	55	66	8	113	12x12	3	1	1°	4°
06	217	193	30	60	260	125	30	85	75	9	1/4"	60	80	8	129	12x12	3	1	1°	7°
07	234	216	30	68	260	125	30	85	85	9	1/4"	65	80	8	146	14x14	3	1	1°	4°